



CATEGORY	DESCRIPTION	P/N #	REV.	ECN NO	DESCRIPTION	REVISED	DATE
CONNECTOR	RJ45 8P8C 带灯带弹(长脚版)	MJ5688-BX11-GRSLX1	A01		New Release	XSY	2015.12.28

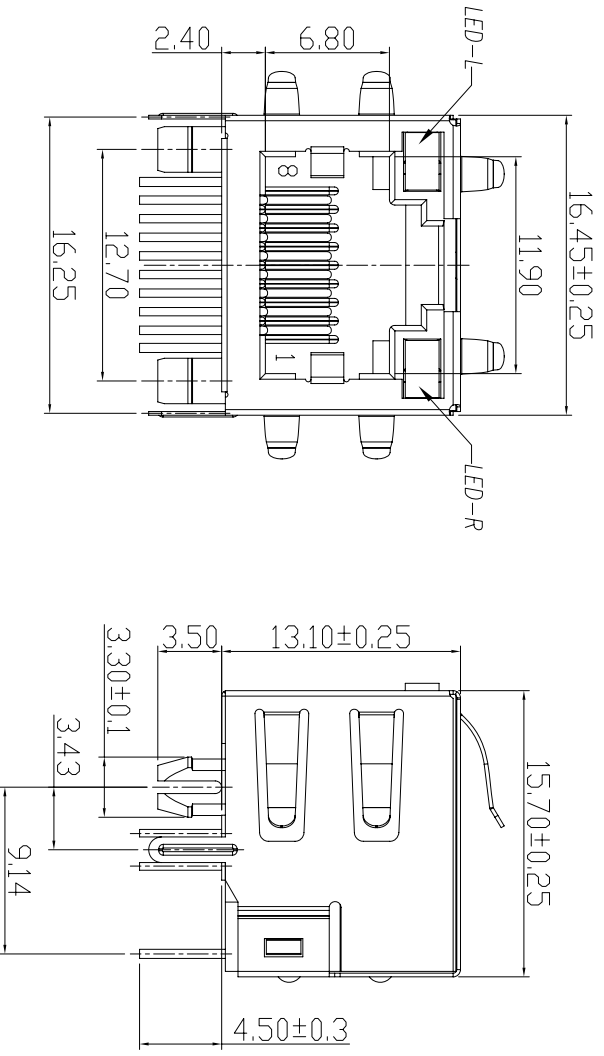



- SPECIFICATION**
- VOLTAGE RATING: 150 VAC RMS.
  - CURRENT RATING: 1.5 AMP
  - CONTACT RESISTANCE: 40 mΩ MAX
  - INSULATION RESISTANCE: 500MΩ MIN.
  - WITHSTAND VOLTAGE: AC1000V RMS 60s.
  - OPERATING TEMPERATURE: -40°C~+80°C

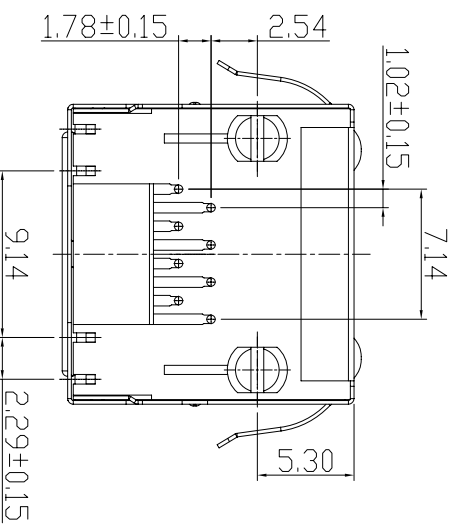

MJ5688-BX11-GRSLX1  
外露脚长4.5mm

X	LED-L	LED-R
1	Green	Yellow
2	Yellow	Green

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

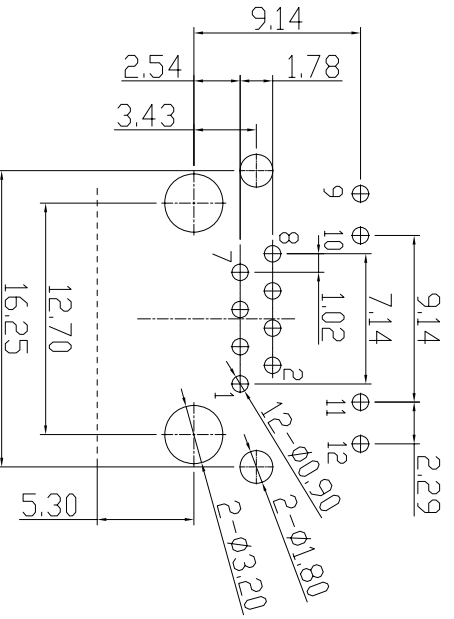

Recommend PCB Layout  
(Jack Top View)  
Tolerance: ±0.05mm  
Recommend PCB Thickness: 1.6mm

A	e	LED-R	1	SEE TABLE 1	Tin PALTING	
	d	LED-L	1	SEE TABLE 1	Tin PALTING	
	c	SHELL	1	BRASS T=0.2mm	Ni PALTING	
	b	TERMINAL	8	PHOSPHOR BRONZE ∅0.46mm	SEE TABLE 2	
	a	HOUSING	1	PBT UL94V-0	BLACK	
	NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2

XX : ±0.3 XX : ±1\*

XXX : ±0.2

SCALE: 1/1 UNIT: mm DWG. NO:

SIZE: A3 PAGE: 1 OF 1 REV: A01 W1-061-183

APPROVED BY: XSY CHECKED BY: XSY PREPARED BY: XSY

DICK

**東莞市合陵電子有限公司**  
DongGuan Heling Electronic Co.,LTD

Connector

CUSTOMER COPY